



ANNOVEX Ex

Evaluator type GMA 30.00.xxx

- Ex I M1 Ex ia I Ma
- Automatic recognition of the connected devices
- Digital data transmission between the devices
- Data processing by microcontroller
- Output range of the output signal is variable
- Illuminated four-digit graphic display with alpha numeric display line
- Adjustments or status enquiries by means of a press button unit or a magnetic pointer. The housing need not be opened
- Code lock to prevent unauthorized manipulation (can be switched off)
- Fault self diagnosis with alpha numeric display
- Test of the output signal by simulated values
- Choice between normed analog or digital output signals (optional)
- Two built-in limit switches with optocouplers or relays (optional)
- Audio visual alarm unit AVS 3 optional
- Housing protection rating IP65
- Antistatic plastic housing

The ANNOVEX-Evaluator is an universal evaluator for the sensors/transmitters of the ANNOVEX/MONIMET-system.

All available device types can be connected. The Evaluator automatically recognizes the sensor/transmitter and takes over the display, the evaluation and operation of the sensor/transmitter.

Simple and secured operability, robustness, low weight and small dimensions distinguish the cost efficient, stationary ANNOVEX-Evaluator.

These devices conform to the explosion protection rating of intrinsic safety „i“, category I M1 Ex ia I Ma. This means that these devices can be used in the zone M1 of underground mines, even when unpermitted high concentrations of the methane gas are prevailing.

This certification conforms to the ATEX directive 2014/34/EU for devices and protective systems permitted for use in areas endangered by explosions.

The ANNOVEX-Evaluator can be extended with an additional limit switch unit that is equipped with relays or optocouplers.

The operation of the device is very simple and the housing need not be opened: The operator places a small magnetic press button unit on the device. As an alternative he can also use a magnetic pointer. A four digit code protects against unauthorized changing of the set values (can be switched off).

A self monitoring microcontroller system not only processes the measurement values precisely, it also carries out the operator specific instructions such as the entry of the code, signal instructions and messages, analog and digital outputs and test functions etc. A four digit back lit graphic display shows the measured values in 12 mm high digits.

The ANNOVEX-Evaluator is protected by an antistatic plastic housing (impact strength 7 Joule).


The sensor is to be connected by means of a plug-in connector. Cable entries or a plug-in connector for the electrical connection are attached on the lower side of the housing.

Holes on the back of the device permit a rigid mounting.

In addition, the ANNOVEX-Evaluator can be equipped with the audio visual alarm unit AVS 3 for giving alarms in the monitored area.

One or more audiovisual alarm devices Type AVS 4 can be connected to an ANNOVEX-Evaluator for giving an extended alarm signal on site.

All ANNOVEX/MONIMET devices can be fed by the uninterruptible power supply device Type USV 4, which also has an ATEX-certification.

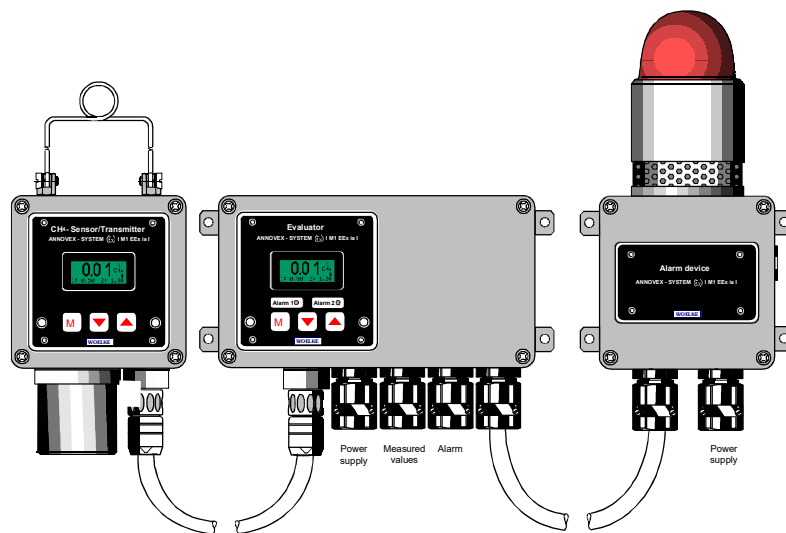

Connectable ANNOVEX/MONIMET device types

CH₄-Sensor/transmitter or Monitor Type GMx 01.01.xxx
Measuring range: 0.00...5.00 vol %
Measuring principle: Catalytic combustion
Temperature compensation

CH₄-Sensor/transmitter or Monitor Type GMx 01.02.xxx
Measuring range: 0.0...100.0 vol %
Measuring principle: Thermal conductivity
Humidity and temperature compensation

CH₄-Sensor/transmitter or Monitor Type GMx 01.03.xxx
Measuring range: 0.00...5.00...100.0 vol %
Measuring principle: Catalytic combustion/thermal conductivity
Catalytic combustion sensor protection against high gas concentrations
Humidity and temperature compensation

CH₄-Sensor/transmitter or Monitor Type GMx 01.04.xxx
Measuring range: 0.00...5.00...100.0 vol %
Measuring principle: Infrared (NDIR)
Temperature, humidity and pressure compensation

CH₄-Sensor/transmitter or Monitor for the gas suction treatment
Type GMM 01.13.xxx
Measuring range: 0.0...100.0 vol %
Measuring principle: Thermal conductivity
Humidity and temperature compensation
Pressure compensation (optional)
Diffusion or partial flow pipe with test gas connection (optional)

O₂-Sensor/transmitter or Monitor Type GMx 02.05.xxx
Measuring range: 0.00...30.00%
Measuring principle: Electrochemical
Temperature and pressure compensation

CO-Sensor/transmitter or Monitor Type GMx 03.05.xxx
Measuring range: 0.0...500.0 ppm
Measuring principle: Electrochemical
Temperature and pressure compensation

CO₂-Sensor/transmitter or Monitor Type GMx 04.04.xxx
Measuring range: 0.00...10.00 vol %
Measuring principle: Infrared (NDIR)
Temperature and pressure compensation

CO₂-Sensor/Transmitter oder Monitor für die Gasabsaugung
Typ GMM 04.14.xxx
Messbereich: 0,00...10...20,00 Vol %
Messprinzip: Infrarot (NDIR)
Temperatur - und Druckkompensation
Diffusionsrohr oder Teilstromrohr mit Prüfgasanschluss (optional)

H₂-Sensor/transmitter or Monitor Type GMx 11.05.xxx
Measuring range: 0.0...1000.0 ppm
Measuring principle: Electrochemical
Temperature and pressure compensation

H₂S-Sensor/transmitter or Monitor Type GMx 05.05.xxx
Measuring range: 0.0...100.0 ppm
Measuring principle: Electrochemical
Temperature and pressure compensation

NO-Sensor/transmitter or Monitor Type GMx 13.05.xxx
Measuring range: 0.0...100.0 ppm
Measuring principle: Electrochemical
Temperature and pressure compensation

NO₂-Sensor/transmitter or Monitor Type GMx 14.05.xxx
Measuring range: 0.0...20.0 ppm
Measuring principle: Electrochemical
Temperature and pressure compensation

Temperature-Sensor/transmitter or Monitor Type GMx 10.10.xxx
Measuring range: -20.0...60.0 °C
Measuring principle: Thermoresistive (PT 100)

ANEMOMETER-Sensor/transmitter Type GMx 15.07.180
Measuring range: 0.15...12.00 m/s or 0.005...1800 m³/s
Measuring principle: Hot film anemometry
Temperature and pressure compensation

Common technical Data

Adjustment range of the device code 0000...9999

Supply voltage 9...16 V-

Current consumption

with 1 mA- or 15 Hz-output	15 mA
with 20 mA-output	35 mA
with Optocoup. a. 1 mA- or 15 Hz-output	17 mA
with Relays a. 1 mA- or 15 Hz-output	27 mA
with Optocoup. a. 20 mA-output	37 mA
with Relays a. 20 mA-output	47 mA

Current consumption of the audio visual alarm additionally max. 100 mA

Frequency output

Frequency range 6...15 Hz, switchable to 5...15 Hz
Adjustable output range see measuring range of the connected sensor/transmitter
Optocoupler output max.: 30 V, 100 mA, 100 mW

Current output (alternative to the frequency output)

Ranges and loads 0,1/0,2...1 mA / $\leq 5200 \Omega$ or 4...20 mA / $\leq 200 \Omega$
Adjustable output range see measuring range of the connected sensor/transmitter

Test function with simulated measured values 10 decimal steps from the start to the final value of the range of the data transmission output

Limit switch Alarm 1 and Alarm 2

Setting range see measuring range of the connected sensor/transmitter
Optocoupler output max.: 30 V, 100 mA, 100 mW
Relay output (quiescent current principle) max. 30 V, 1 A, 30 W

Audio visual alarm unit (AVS 3) optional

Signal tone	Sweeping 2400-2850 Hz, with 7 Hz
Signal intensity	max. 103 dB (1m)
Flashing light	10 red, ultra bright, pulsed LEDs
Signal frequency Alarm 1, Alarm 2	0.5 Hz, 1 Hz

Surroundings temperature -20°C...+60°C
Humidity, non condensing 0...98 % rel.

Dimensions without alarm unit W 220 mm, D 90 mm, H 160 mm
or W 122mm, D 90 mm, H 160 mm
Weight without alarm unit 2,5 kg or 2 kg
Type of protection IP 65
Material / Impact strength Polyester, surface resistance $<10^9 \Omega$ / $>7 \text{ Joule}$

Accessories to be ordered separately:

Connecting cable	VDL 4, 20 m; max. length 100 m ($R_L \leq 7,8 \Omega$)
Press button device	TAS 3